
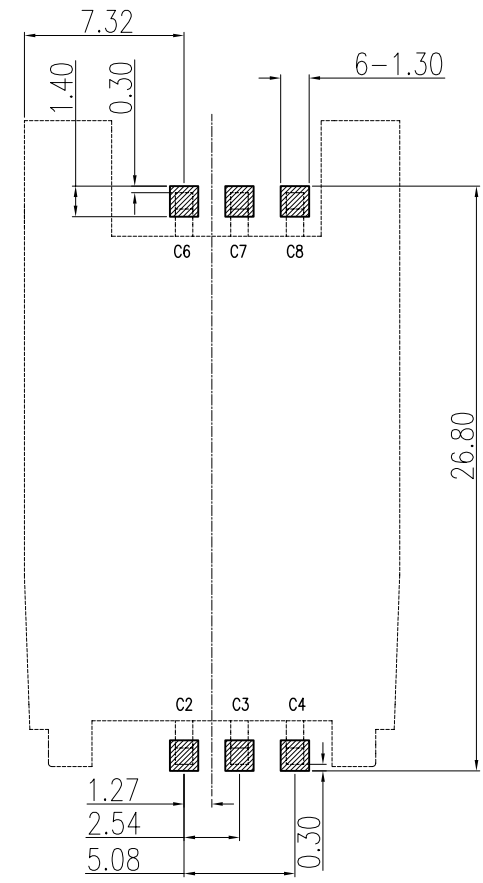


ÓÉ Foxit PDF Editor ±¼-
 °æË"ËüÖÐ (c) by Foxit Software Company, 2004
 ½öÖÁÖU/EA'Aj£

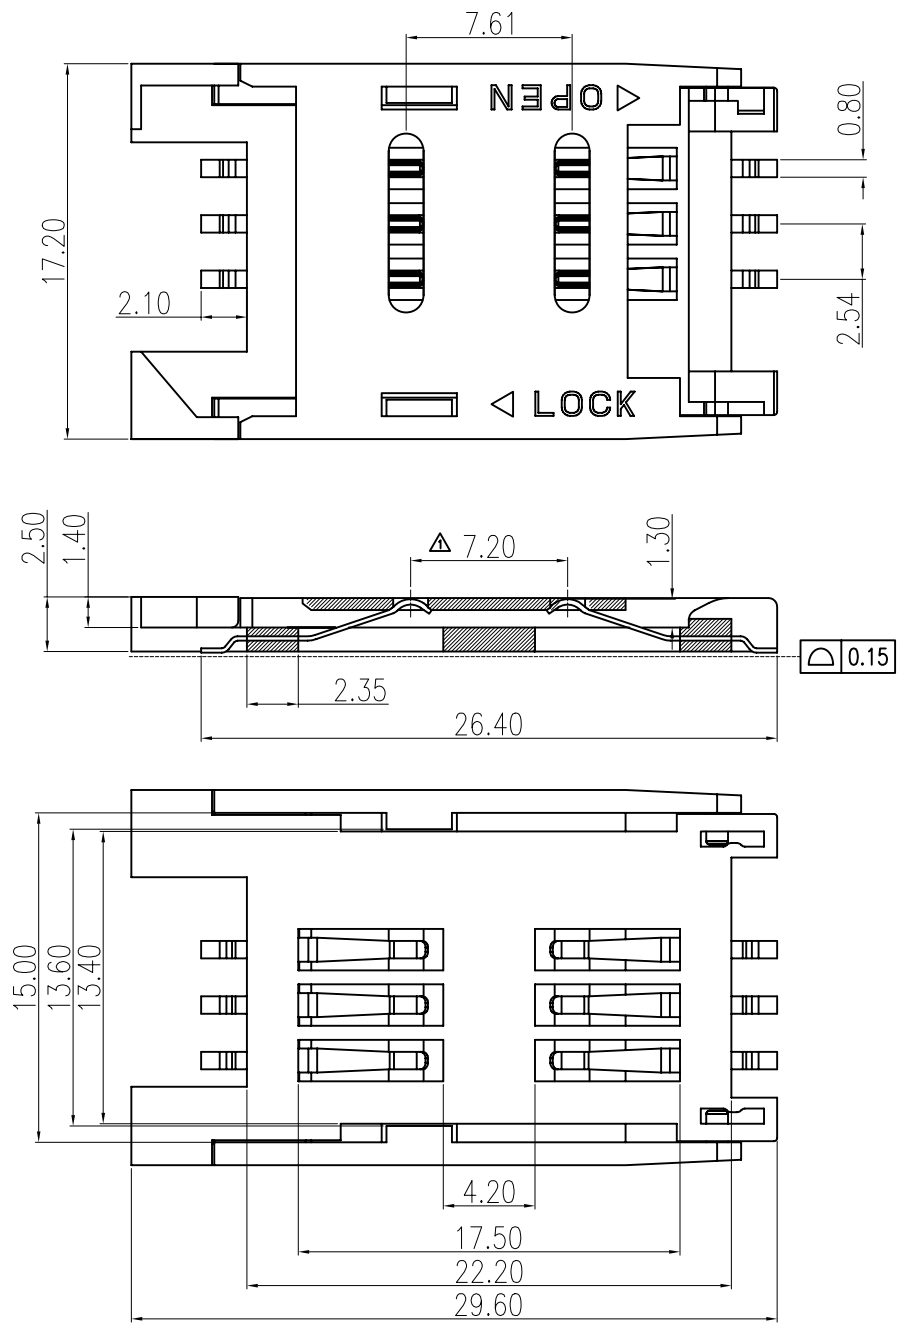

RECOMMENDED PCB PATTERN DIM.
 TOLERANCE : ±0.05

- A.Material:
- 1.Insulator:High temperature thermoplastic UL94V-0,(BLACK LCP)
 - 2.Pho.Bronze:Plating,
 50U" MIN NICKEL UNDERPLATED;
 3-8U" GOLD ON THE CONTACT AREA;
 100U" TIN PLATING ON SOLDER TAIL
- B.Electrical specifications:
- Voltage rating: 10 V AC
 - Current rating: 0.5A
 - Dielectric strength: 500V AC for 1 minute min
 - Insulation resistance: 1000 M ohm
 - Contact resistance: 100 mill.ohm max
 - Operation temperature: -25° to +95°
 - Product withstanding rff low soldering 260° for 10s
- C.Mechanical specieications:
- 3.1 Durability: 5000 cycles

CUSTOMER DRAWING				一般公差 GENERAL TOLERANCE			
				.X	±0.38	制图 (DR): Kevin	
				.XX	±0.25	审核 (CHKD):	
				.XXX	±0.15	料号(PART NO): SIMQS2525-X06-00RS	
				ANGLES	±2°	比例(SCALE):	
接触点距离修订 Kevin 2008/06/14				版本(REV): A	核准 (APPD):		
修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	张数(SHEET): 1 OF 2	单位(UNITS): mm	图幅(SIZE): A4	