
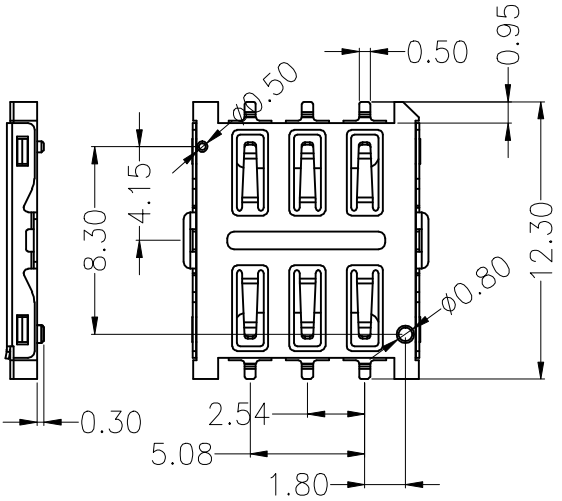


ÓÉ Foxit PDF Editor ±¼-
°æË"ËüÖÐ (c) by Foxit Software Company, 2004
½00ÄÖÜ/EA¹ÄË

* 所有原材料, 生产制程, 电镀必须符合ROHS要求

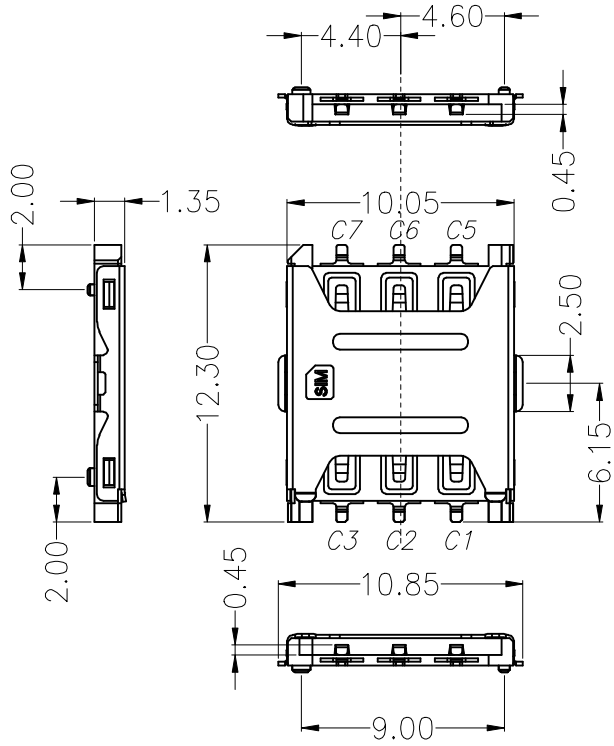




SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

Specification

MATERIAL:
Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: C5210
SHIELD: SUS

PLATING:
Contact: Plated 50µ" Ni Overall Contact ALL Au 1U,
Shell: Plated 50µ" Ni Overall, PVD Au 1U

Electrical:
Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range :-20° C~+60° C
Storage Temperature Range :-40° C~+70° C
Ambient Humidity Range :96% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M Ω min./500VDC
Mating Cycles:10,000 Insertions
产品存储温度: 200° C *60.00°C
Mating Cycles:3,000 Insertions Min

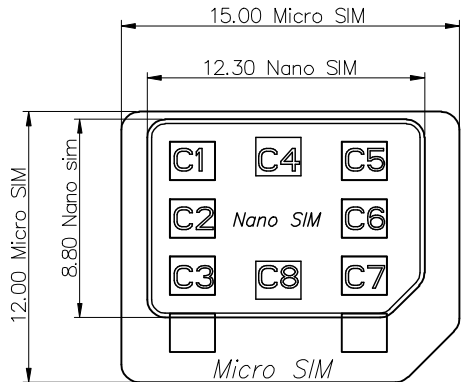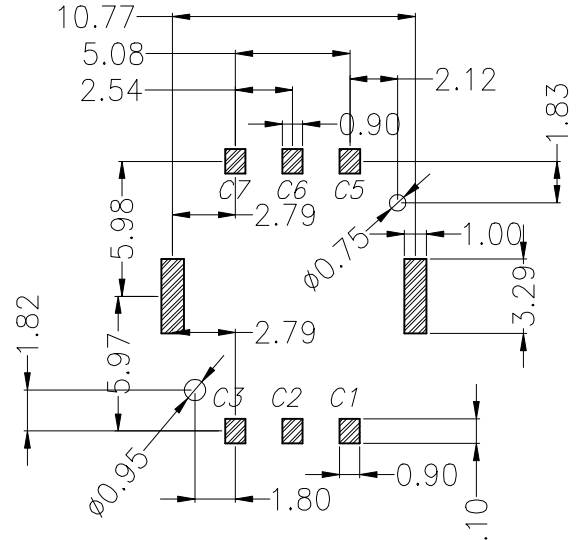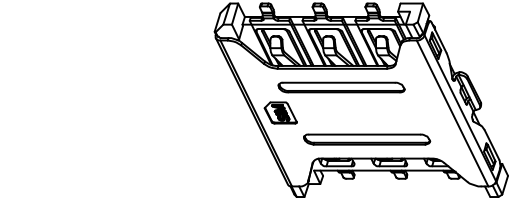

REVISED NO.	REV. NO.	DESCRIPTION	DATE
1			
2			

DRAWING DATA:		PRODUCT NAME:		DATE:	
UNLESS OTHERWISE SPECIFIED		NANO-SIM 卡 NO-PUSH 1.35H INT 针		2015/04/10	
DIMENSION		TOLERANCE		DATE:	
LINE: ±		0.15		2015/04/11	
LINE: ±		0.10		DATE:	
LINE: ±		0.05		2015/04/11	
ANGULAR: ±		1°		PAGE:	
		SCALE: 1:1		1 of 1	