


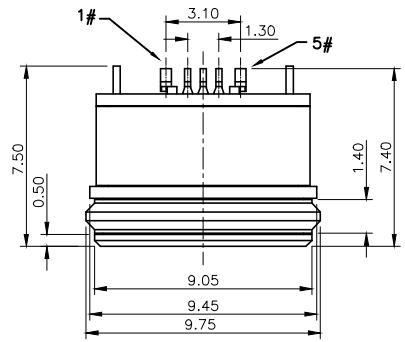
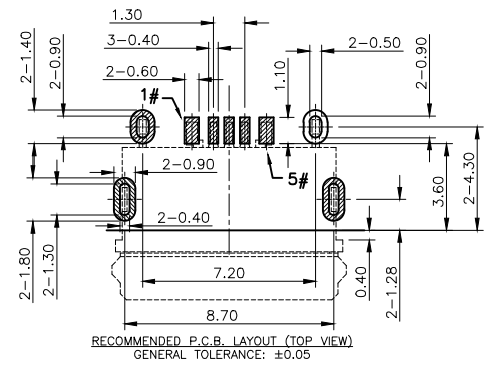

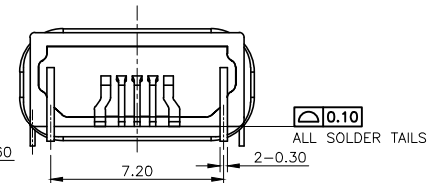



REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW		



3D VIEW

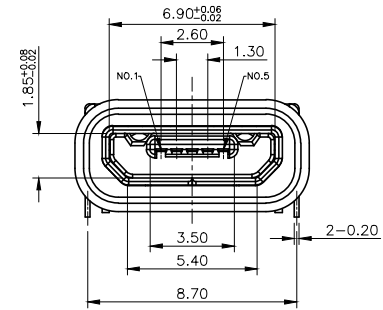

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05

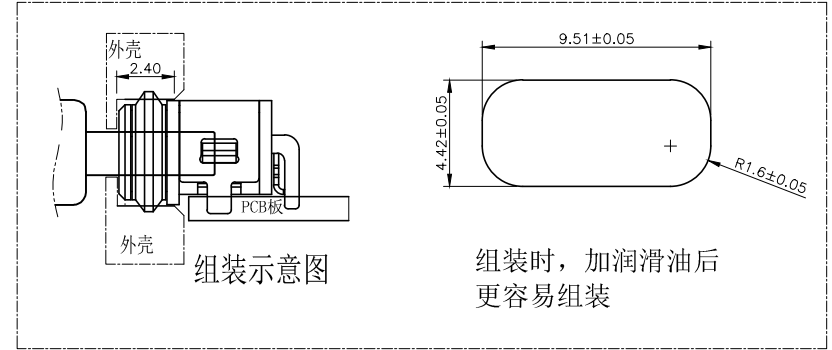


组装示意图

组装时，加润滑油后
更容易组装

⑦	Oval ring	1	Rubber	Black
⑥	Glue	1	-----	Black
⑤	U-shaped frame	1	Copper alloy or stainless	Nickel plated
④	Inner shell	1	Copper alloy or stainless	Nickel plated
③	Terminal	5	Copper alloy, 0.15t	Gold Plated On Contact Area.
②	Outer shell	1	High temperature thermoplastic	Black
①	Body	1	High temperature thermoplastic	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
1.1. RATING: 3A(PIN1&5),0.5A(PIN2&3&4);
1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.;
1.4. INSULATION RESISTANCE: 1000MΩ MIN.;
2. DURABILITY: 10,000 CYCLES MIN.;
3. INSERTION FORCE: 3.5Kgf (35N) Max.;
4. EXTRACTION FORCE: 0.8Kgf (8N) Min;
5. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8(1.5m,30min)
6. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

X. ±0.50	X.° ± 2°	UNITS	TITLE: MICRO USB B型防水母座 板上型前插后贴			
.X ±0.30	.X° ± 1°	mm				
.XX ±0.10	.XX° ± 0.5°	MAT'L	APPD:			
.XXX ± 0.05						
		FINISH	CHKD:		DWG NO.:	
		Q'TY				
			DR:			
			SCALE	SHEET	REV.	
			1/1	1/1	A1	